



G20-LS/G30-LS SERIES LOAD SENSE PUMP



The Load Sensing Concept

Load Sensing is a hydraulic circuit configuration which allows the load, as sensed at the control valve, to modulate pump output in relation to system demand. Controlling both flow and pressure at the pump allows for a significant reduction in valving losses and circuit inefficiencies. The machine is therefore more efficient in terms of power distribution and life is enhanced due to superior load control.

- * Improved Hydraulic System Efficiency
- * Improved Vehicle Life
- * Efficiently Sized Componentry

Benefits of Load Sensing Systems

Load Sensing Systems have been applied to hydraulic applications, in several configurations, to provide efficiency and performance advantages over standard circuit designs. Load sensing piston pumps or load sensing unloading valves have typically been used in these applications. John S. Barnes has developed a load sensing gear pump to combine the advantages of these two technologies. The G20-LS (1.41 - 5.30 in.³) and the G30-LS (3.54 - 9.82 in.³) provide the following advantages to your machine:

- * Lower Fuel and Input Power Consumption
- * Cooler Hydraulic System Operation
- * Longer Component Life and Reliability
- * Improved Vehicle Power Distribution
- * Better Load Control

Design Advantages of G20-LS and G30-LS Pumps

The simplicity and inherent advantages of the gear pump design are realized with the G20-LS and G30-LS. The G20-LS and G30-LS feature the operational benefits of a piston pump with the performance, reliability, and cost advantages of a gear pump.

- * Lower Pump Cost
- * 4000 PSI Continuous Pressure Rating
- * High Speed Capability
 - Up to 4000 RPM
- * Displacement Flexibility
 - 1.41 to 9.82 in.³/rev.
- * Gear Pump Serviceability
- * Added Tolerance Under Extreme Operating Conditions
 - Contaminated Environments
 - High Temperatures
 - Cold Start-Ups
 - Poor Inlet Circumstances
- * Ultra Quick Response Time to Load Sense Signal
 - 100 Milli-seconds or Less

How the G20-LS and G30-LS Pumps Operate

Every hydraulic application has two known operating conditions - **running** (when hydraulic flow is required) and **standby** (when no hydraulic flow is required).


Running Condition:

In the running condition, the G20-LS / G30-LS load sensing element continuously monitors the output flow required for the system load demand. The pump alters its flow at the pump and matches the system load demand and delivers the exact flow required. Flow regulation at the pump eliminates efficiency losses associated with alternative systems which alter flow at the directional valve and regulate system pressure with a system relief valve.

Standby Condition:

In the standby condition, the load sensing element senses a zero demand condition and unloads all flow directly to the system's reservoir. In the standby condition, flow is unloaded at approximately 20 PSI, hence, greatly reducing horsepower consumption and system heat.

The chart below illustrates the horsepower conservation advantages of the G20-LS/G30-LS pump when compared to the common alternative system designs of a piston pump and a standard open center valve/gear pump combination.

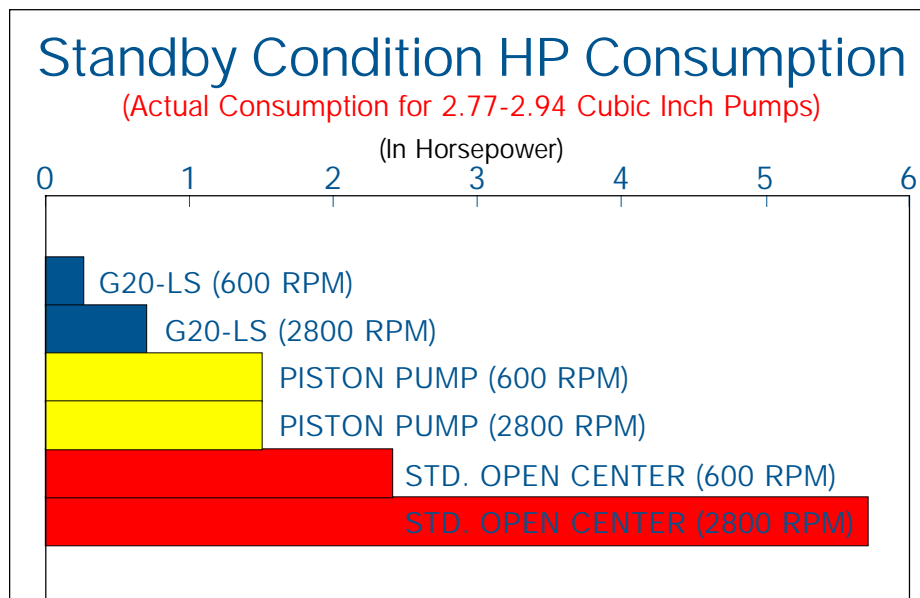

NOTE: In the standby condition, piston pumps operate at 200-500 PSI and produce 1-2 GPM for internal lubrication purposes. This condition results in higher horsepower consumption than the G20-LS / G30-LS at standby.

Where to Apply the G20-LS and G30-LS Pumps

Mobile Applications

The G20-LS and G30-LS are best applied in mobile applications where the vehicle duty cycle is concentrated in either the full speed or the standby condition. The G20-LS and G30-LS are ideal choices for vehicles which have extended transport or "roading" modes. Examples of these types of vehicles would include tractors, wheel loaders, snow and ice removal trucks and many others. Significant horsepower savings as described above is achieved during the standby mode. The G20-LS / G30-LS may not have advantages over the piston pump in applications where flow must be continuously "metered", consequently the selection of these pumps is dependent upon the application.

Industrial Applications

The G20-LS and G30-LS can also be used in many industrial type hydraulic applications to simplify and cost reduce traditional circuits. General load sensing, accumulator unload, vented relief valve, multiple relief valve and other types of circuits can all be simplified and cost reduced by using the G20-LS and G30-LS pumps. These circuits typically use expensive unloader or vented relief valves and the G20-LS and G30-LS can reduce system costs by 50% or more by incorporating the load sensing feature in the pump and using significantly less expensive standard directional control valves. (Associated installation costs are also reduced because of the circuit simplification achieved by using the G20-LS and G30-LS along with standard directional control valving.)


G20-LS Specifications and Application Data

Single Model Series	Gear Code	Flow @ 1800 RPM		Theoretical displacement per revolution		Continuous Rated pressure		Rated speed @ rated pressure & .17 bar (6" Hg) vacuum inlet rpm	Unloaded max. speed rpm	Min. speed @ rated pressure rpm*	Typical delivery @ rated speed & pressure	
		l/min	gpm	cm ³	in ³	bar	psi				l/min	gpm
G20LS	23	41.6	11	23	1.41	276	4000	3600	4000	1000	75.7	20
	29	53.0	14	29	1.79	276	4000	3400	4000	800	90.8	24
	36	64.3	17	36	2.18	276	4000	3200	4000	600	105.9	28
	43	75.7	20	43	2.60	276	4000	3000	4000	600	117.3	31
	48	87.0	23	48	2.94	276	4000	2800	4000	600	124.9	33
	55	98.4	26	55	3.33	250	3625	2500	4000	600	128.7	34
	62	109.8	29	62	3.77	228	3300	2500	4000	600	147.6	39
	68	121.1	32	68	4.13	228	3000	2500	4000	600	162.7	43
	77	140.0	37	77	4.71	190	2750	2500	4000	600	185.4	49
	87	155.2	41	87	5.30	170	2475	2300	4000	600	193.0	51

Design flow control should be based on Δ P of 200 PSI across the control orifice. Adjustable Bias Factory Set at 200 PSI (14 BAR). Adjustable System Relief Valve from 1000 - 3000 PSI (69 - 207 BAR) in 250 PSI (15 BAR) increments and from 3000 - 4000 PSI (69 - 276 BAR) in 500 PSI (35 BAR) increments.


* Lower speeds are permissible when operating below rated pressure.

G20-LS Drive Shafts

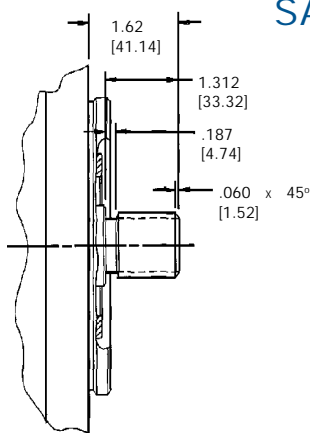


SAE "B" SPLINE
Major Dia. Fit

Shaft No. 11:
292.6 Nm (2590 in.lb.) torsional capacity.*

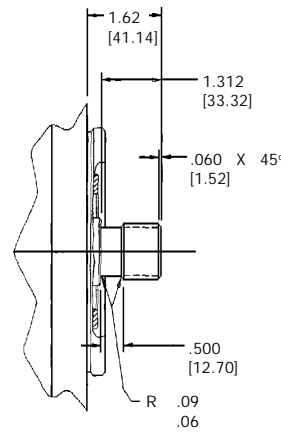


SAE "B" SPLINE
Flat Root-Side Fit

Shaft No. 12:
279.6 Nm (2475 in.lb.) torsional capacity.*

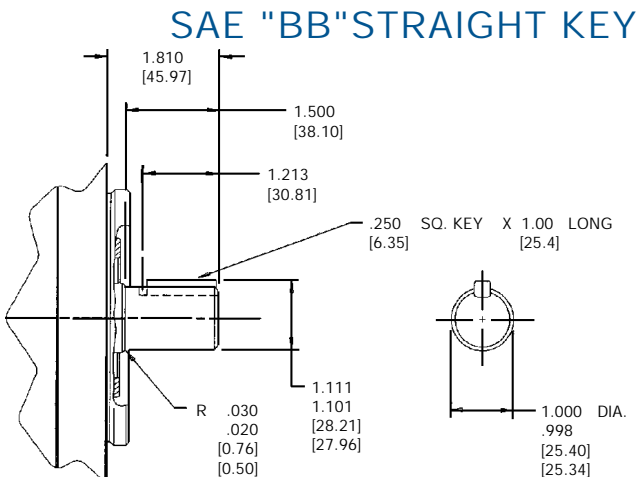

SAE "BB" STRAIGHT KEY

Shaft No. 21:
395.7 Nm (3500 in.lb.) torsional capacity.*

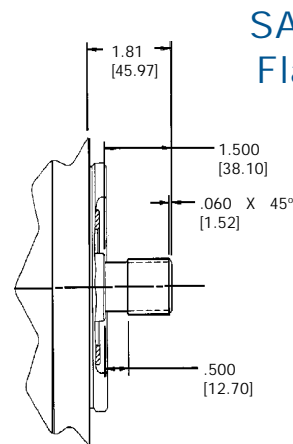

SAE "BB" SPLINE
Flat Root-Side Fit

Shaft No. 99:
451.9 Nm (4000 in.lb.) torsional capacity.*


* Consult representative if application requires greater capacity or has side loads.

G20-LS Installation Dimensions

Inches (mm)

Mounting flange dimensions shown are for SAE "B" 2-Bolt.

SAE "A" flange is also available.

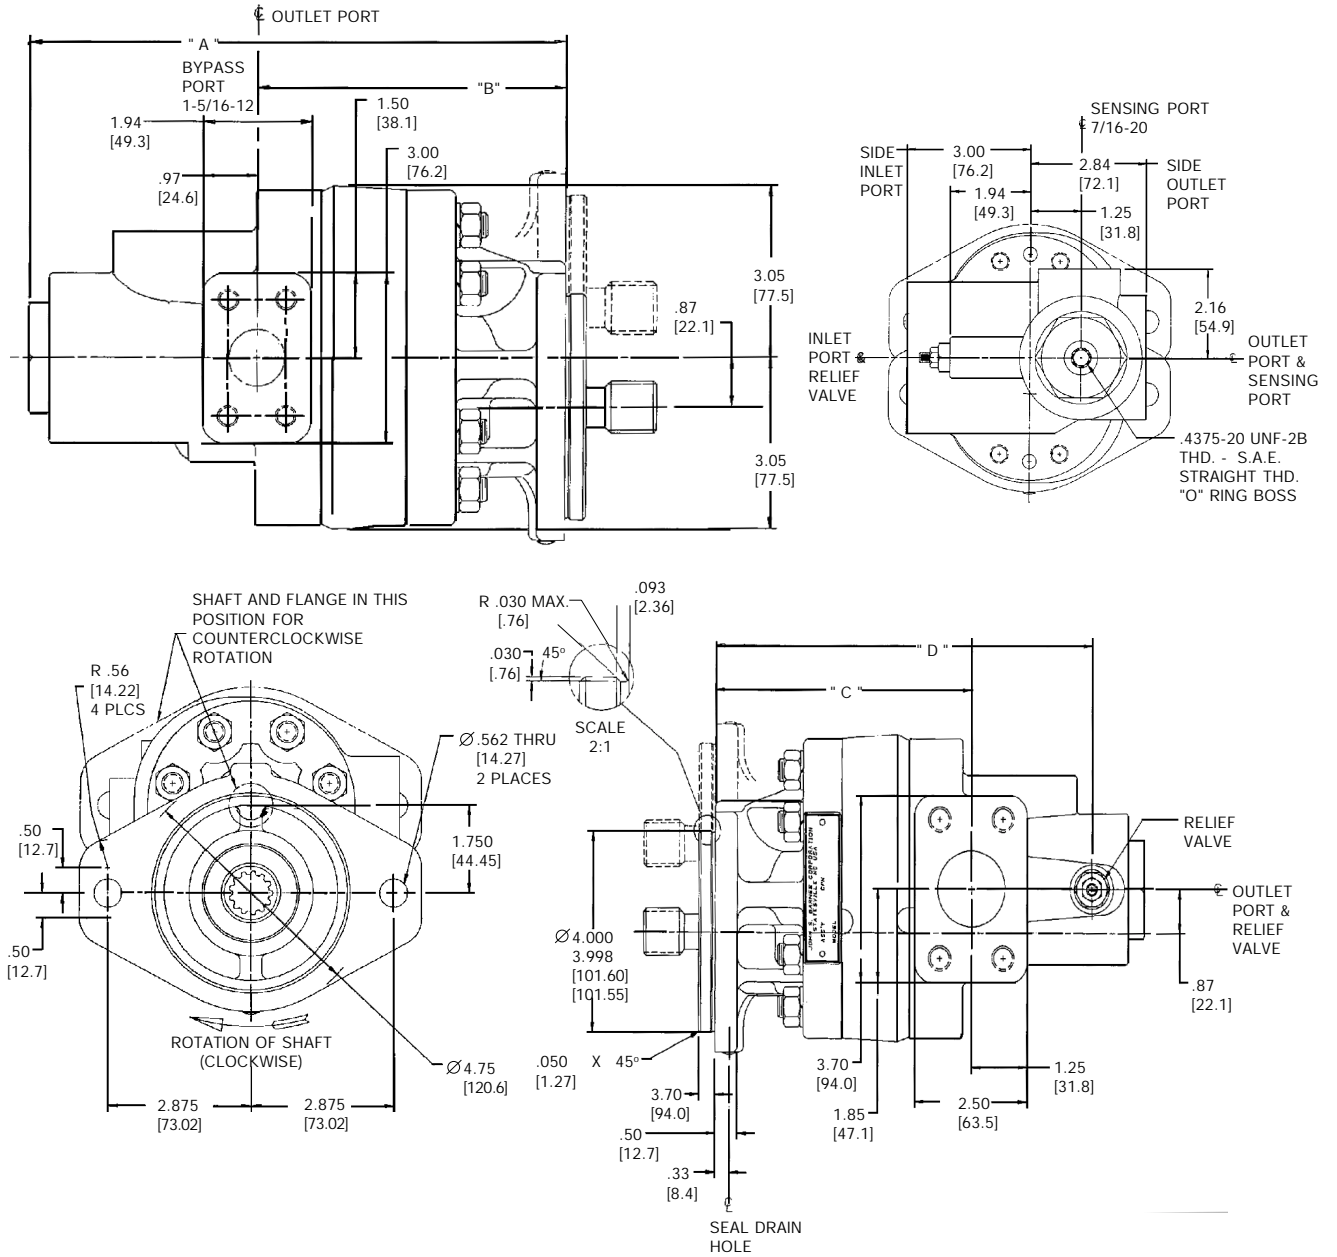

Model	" A " Inch (mm)	" B " Inch (mm)	" C " Inch (mm)	" D " Inch (mm)	App. Wt. Lbs. (kg)
G20LS-2*23*-**-**-**	9.03 (229.4)	4.63 (117.6)	4.85 (123.2)	7.67 (194.9)	35.4 (15.65)
G20LS-2*29*-**-**-**	9.21 (233.9)	4.81 (122.2)	5.03 (127.8)	7.85 (199.4)	35.0 (15.88)
G20LS-2*36*-**-**-**	9.39 (238.5)	4.99 (126.8)	5.21 (132.3)	8.03 (204.0)	35.1 (15.92)
G20LS-2*43*-**-**-**	9.58 (243.3)	5.18 (131.6)	5.40 (137.2)	8.22 (208.8)	36.5 (16.56)
G20LS-2*48*-**-**-**	9.74 (247.4)	5.34 (135.6)	5.56 (141.2)	8.38 (212.9)	37.0 (16.78)
G20LS-2*55*-**-**-**	9.91 (251.7)	5.51 (140.0)	5.73 (145.5)	8.55 (217.2)	37.6 (17.06)
G20LS-2*62*-**-**-**	10.11 (256.8)	5.71 (145.0)	5.93 (150.6)	8.75 (222.3)	38.0 (17.24)
G20LS-2*68*-**-**-**	10.28 (261.1)	5.88 (149.4)	6.10 (154.9)	8.92 (226.6)	39.0 (17.69)
G20LS-2*77*-**-**-**	10.55 (268.0)	6.15 (156.2)	6.37 (161.8)	9.19 (233.5)	40.0 (18.14)
G20LS-2*87*-**-**-**	10.82 (274.8)	6.42 (163.1)	6.64 (168.7)	9.46 (240.3)	41.8 (18.96)

G30-LS Specifications and Application Data


Single Model Series	Gear Code	Flow @ 1800 RPM		Theoretical displacement per revolution		Continuous Rated pressure		Rated speed @ pressure & vacuum inlet rpm	Unloaded speed @ max. speed rpm	Min. speed @ rated pressure rpm*	Typical delivery @ rated speed & pressure	
		l/min	gpm	cm ³	in ³	bar	psi				l/min	gpm
G30LS	58	94.0	24.8	58	3.54	276	4000	3000	4000	600	156.9	41.4
	68	109.9	29.0	68	4.13	276	4000	3000	4000	600	183.1	48.3
	80	130.4	34.4	80	4.91	276	4000	3000	4000	600	217.6	57.4
	91	146.7	38.7	91	5.51	276	4000	2750	4000	600	223.6	59.0
	97	156.9	41.4	97	5.89	276	4000	2500	4000	600	217.6	57.4
	104	167.5	44.2	104	6.30	250	3625	2500	4000	600	232.7	61.4
	113	183.4	48.3	113	6.88	250	3625	2500	3700	600	233.9	67.0
	129	208.8	55.1	129	7.86	228	3300	2400	3300	600	278.6	73.5
	145	239.0	62.0	145	8.84	190	2750	2300	2900	600	300.2	79.2
	161	261.1	68.9	161	9.82	170	2475	2200	2500	600	319.1	84.2

Design flow control should be based on ΔP of 200 PSI across the control orifice. Adjustable Bias Factory Set at 200 PSI (14 BAR). Adjustable System Relief Valve from 1000 - 3000 PSI (69 - 207 BAR) in 250 PSI (15 BAR) increments and from 3000 - 4000 PSI (69 - 276 BAR) in 500 PSI (35 BAR) increments.

* Lower speeds are permissible when operating below rated pressure.


G30-LS Drive Shafts

G30 SAE "C" STRAIGHT KEY

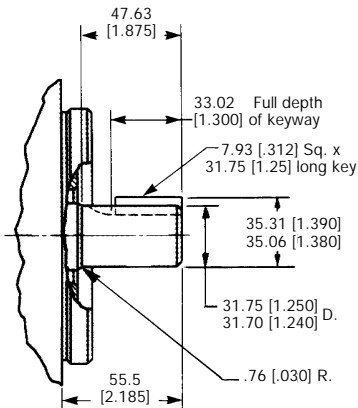

Shaft No. 1:
720.8 Nm (6380 in. lb.) torsional capacity.*

G30 SAE "C" SPLINE Flat Root Side Fit

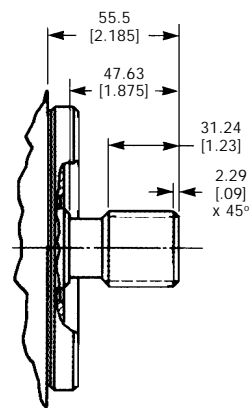


External Involute Spline

Pitch Dia. - 29.63 [1.1667]
Base Dia. - 25.66 [1.0104]
Flat Root - Side Fit
No. of Teeth - 14
Diametral Pitch - 12/24
Pressure Angle - 30°
Form Dia. - 27.49 [1.0822]
Major Dia. - 31.22/31.10 [1.2293/
1.2243]
Minor Dia. - 26.99/26.66 [1.0627/
1.0497]

Circular Tooth Thickness
3.29 [1.294] Max. Eff.
3.24 [1.277] Max. Act. Ref.
3.26 [1.282] Min. Eff. Ref.
3.21 [1.265] Min. Act.
Measurement Over 4.06 [1.600] Dia.
Pins - 35.70 [1.4054] Min. Ref.

Shaft No. 12:
819.1 Nm (7250 in. lb.) torsional capacity.*

G30 SAE "B" SPLINE Flat Root-Side Fit

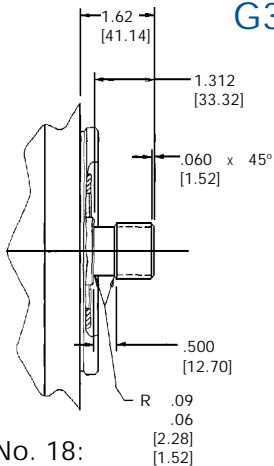

Shaft No. 18:
279.6 Nm (2475 in. lb.) torsional capacity.*

NOTES:

Shaft #18 only available with displacements 58 and 68.

Contact factory for other shaft requirements not listed.


* Consult representative if application requires greater torsional capacity or has side loads.

G30-LS Installation Dimensions

Inches (mm)

Mounting flange dimensions shown are for SAE "C" 4-Bolt.

Other SAE "B" and SAE "C" flanges are also available.

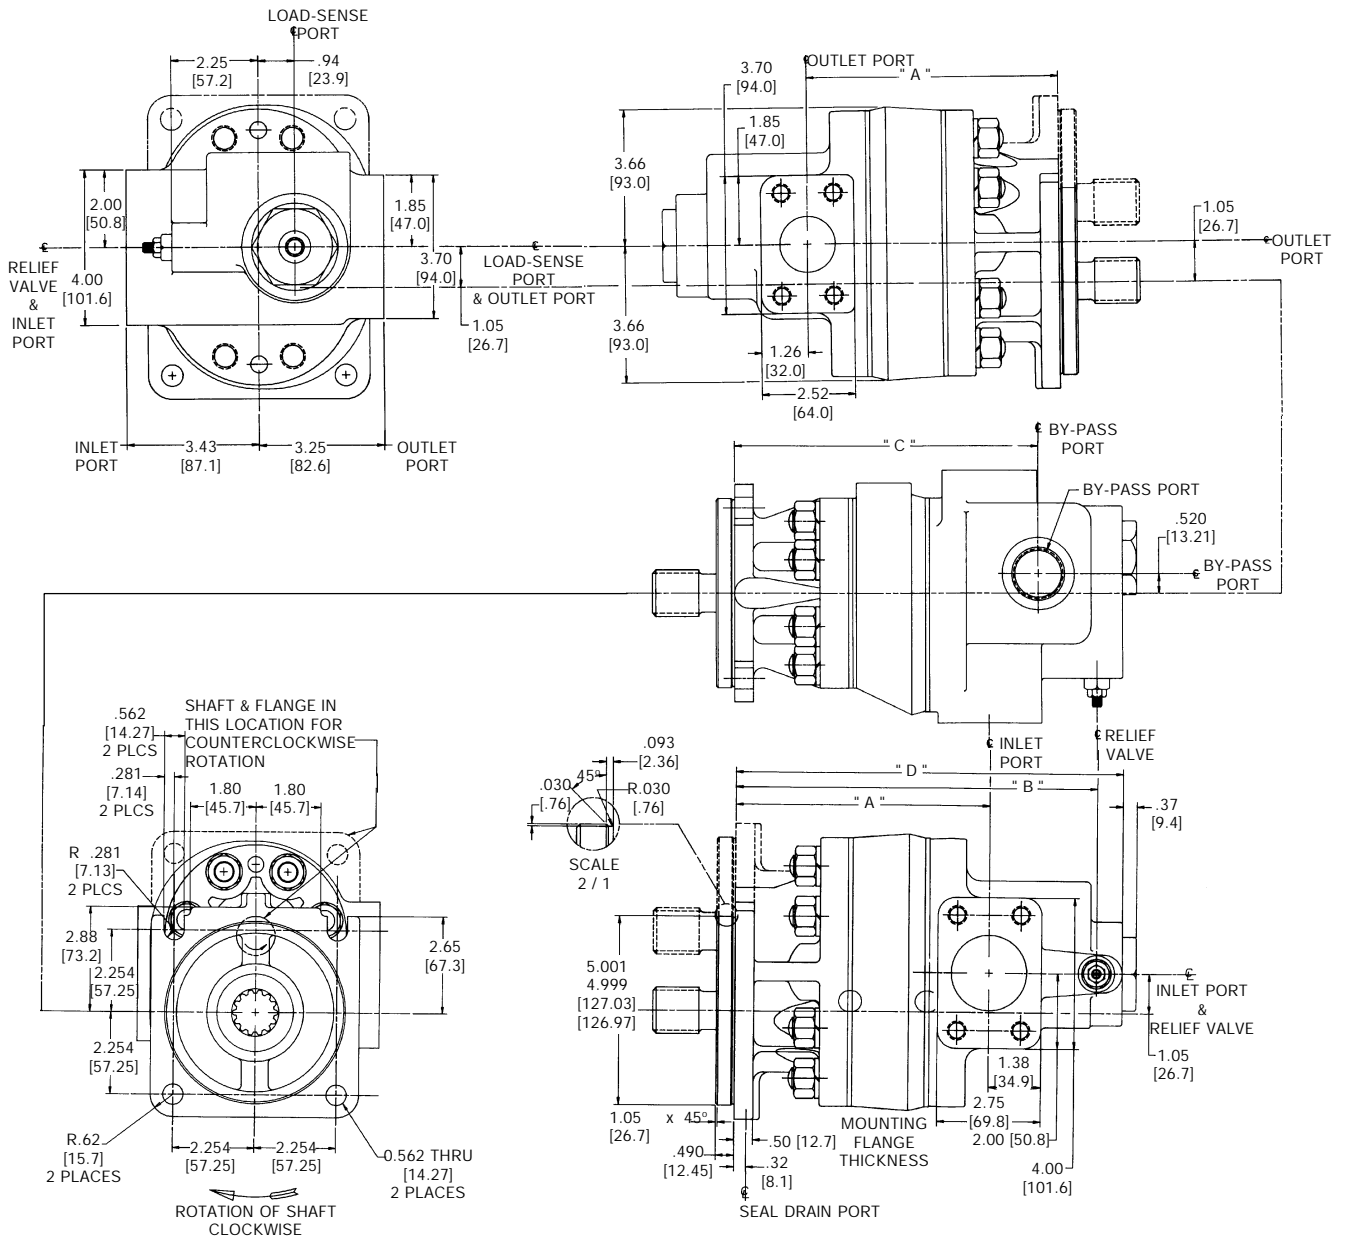

Model	"A" Inch (mm)	"B" Inch (mm)	"C" Inch (mm)	"D" Inch (mm)	App. Wt. Lbs. (kg)
G30LS-4E58**-*_*_*_*_*_*	5.96 (151.4)	8.81 (223.8)	7.26 (184.4)	9.49 (241.0)	52.3 (23.7)
G30LS-4E68**-*_*_*_*_*_*	6.15 (156.2)	9.00 (228.6)	7.45 (189.2)	9.68 (245.9)	53.1 (24.1)
G30LS-4E80**-*_*_*_*_*_*	6.39 (162.3)	9.24 (234.7)	7.69 (195.3)	9.92 (151.0)	55.1 (25.0)
G30LS-4E91**-*_*_*_*_*_*	6.55 (166.2)	9.40 (238.8)	7.85 (199.4)	10.08 (256.0)	56.3 (25.5)
G30LS-4E97**-*_*_*_*_*_*	6.70 (170.2)	9.55 (242.6)	8.00 (203.4)	10.23 (259.8)	57.5 (26.1)
G30LS-4E104**-*_*_*_*_*_*	6.86 (174.1)	9.71 (246.6)	8.16 (207.3)	10.39 (263.9)	58.5 (26.5)
G30LS-4E113**-*_*_*_*_*_*	7.01 (178.1)	9.86 (250.4)	8.31 (211.1)	10.54 (267.7)	60.1 (26.6)
G30LS-4E129**-*_*_*_*_*_*	7.32 (185.9)	10.17 (258.3)	8.62 (210.9)	10.85 (275.6)	61.7 (28.0)
G30LS-4E145**-*_*_*_*_*_*	7.63 (193.8)	10.48 (266.2)	8.93 (226.8)	11.16 (283.5)	64.3 (29.2)
G30LS-4E161**-*_*_*_*_*_*	7.94 (201.7)	10.79 (274.1)	9.24 (234.7)	11.47 (291.3)	66.5 (30.2)

How To Order G20-LS Series Pumps

ORDERING INFORMATION

Each option has been assigned an order code -- listed in the tables below -- for placement in the sequence shown at right.

1 (Special Seals)

Order Code	Description
F3	Viton Seal
Omit	Standard

2 (Pump type)

Order Code	Description
G	Gear Pump

3 (Series)

Order Code	Description
20LS	G20 Load Sense **

4 (Mounting Flange)

Order Code	Description
1	SAE "A" 2-Bolt Flange
2	SAE "B" 2-Bolt Flange
6	SAE "B" 2 & 4-Bolt Combination Flange

5 (Inlet Port Connections)

Order Code	Description
A	43 cc & Under (2.6 In. ³) displacement - SAE 1.875-12
B	48 cc & Over (2.9 in. ³) displacement - 4-Bolt 1-1/2"

6 (Displacement)

Order Code	Cm ³ /In ³	Order Code	Cm ³ /In ³
23	23/1.41	55	55/3.33
29	29/1.79	62	62/3.77
36	36/2.18	68	68/4.13
43	43/2.60	77	77/4.71
48	48/2.94	87	87/5.30

7 (Outlet Port Connections)

Order Code	Description
A	43 cc & Under (2.6 in. ³) displacement - #16 SAE (1.3125"-12)
B	48 cc & Over (2.9 in. ³) displacement - 1", SAE 4-Bolt

ByPass Port:	1 5/16-12 for all sizes
Load Sense Port:	7/16-20 for all sizes

8 (Shaft Seal)

Order Code	Description
A	Single
B	Double

** Multiple pumps available. Contact factory.

EXAMPLE:

(F3)- G-20LS-1-A-23- A-A-1-A-L-25											
1	2	3	4	5	6	7	8	9	10	11	12
Special Seals	Pump Type	Series	Mounting	Inlet Port	Displacement	Outlet Port	Shaft Seal	Shaft Type	Unload Pressure	Shaft Rotation	R. V. Setting
F3	G	20LS	A	23	A	A	1	L	25	A	25

9 (Shaft Types)

Order Code	Description
1	SAE "B" Straight Keyed, .875" dia., 1.312" ext.
11	SAE "B" 13 Tooth Spline (Major Diameter Fit)
12	SAE "B" 13 Tooth Spline (Flat Root-Side Fit)
21	SAE "BB" Straight Keyed 1" dia., 1.50" ext.
99	SAE "BB" 15 Tooth Spline (Flat Root-Side Fit)

Contact factory for other requirements.

10 (Unload Pressure)

Order Code	Description
A	18 PSI Standard Bypass Spring
B *	45 PSI Bypass Spring

* "B" unload spring option required when system contains a high rate compensator in the directional control valve.

11 (Shaft Rotation)

Order Code	Description
L	Counterclockwise
Omit	Clockwise

12 (Relief Valve Setting)

Order Code	Description
10	1000 PSI (69 BAR)
12	1250 PSI (86 BAR)
15	1500 PSI (103 BAR)
17	1750 PSI (121 BAR)
20	2000 PSI (138 BAR)
22	2250 PSI (155 BAR)
25	2500 PSI (172 BAR)
27	2750 PSI (190 BAR)

13 (Load Sense Options)

Order Code	Description
A	Standard Load Sense
B	12 VDC with Spade Connector
C	24 VDC with Type C Connector
D	120 VAC with Type C Connector
E	240 VAC with Type C Connector

14 (Design Designation)

Order Code	Description
10	Modification Level
	Design Level

Standard factory relief valve setting is 2500 PSI (172 BAR). Contact factory for other settings.

How To Order G30-LS Series Pumps

ORDERING INFORMATION

Each option has been assigned an order code -- listed in the tables below -- for placement in the sequence shown at right.

1 (Special Seals)

Order Code	Description
F3	Viton Seal
Omit	Standard

2 (Pump Type)

Order Code	Description
G	Gear Pump

3 (Series)

Order Code	Description
30LS	G30 Load Sense **

4 (Mounting Flange)

Order Code	Description
4	SAE "C" 4-Bolt Mount
6	SAE "B" 2 & 4-Bolt Combination Mount (consult factory)
7	SAE "C" 2-Bolt Mount
8	SAE "C" 2 & 4-Bolt Combination Mount

5 (Inlet Port Connections)

Order Code	Description
D	1.50", SAE 4-Bolt Split Flange
DM	1.50", 4-Bolt Metric Split Flange (M12 x 1.75" Threads)
E	2.00", SAE 4-Bolt Split Flange
EM	2.00", 4-Bolt Metric Split Flange (M12 x 1.75" Threads)
W	#20 SAE (1 5/8" - 12) Straight Thread
X	#24 SAE (1 7/8" - 12) Straight Thread
Y	#30 SAE (2 1/2" - 12) Straight Thread

6 (Displacement)

Order Code	Cm ³ /In ³	Order Code	Cm ³ /In ³
58	58/3.54	104	104/6.30
68	68/4.13	113	113/6.88
80	80/4.91	129	129/7.86
91	91/5.51	145	145/8.84
97	97/5.89	161	161/9.82

7 (Outlet and Bypass Port Connections)

Order Code	Description
C	1.250", SAE 4-Bolt Split Flange
CM	1.250", 4-Bolt Metric Split Flange (M10 x 1.50" Threads)
D	1.50", SAE 4-Bolt Split Flange
DM	1.50", 4-Bolt Metric Split Flange (M12 x 1.75" Threads)
V	#16 SAE (1.3125" - 12) Straight Thread
W	#20 SAE (1 5/8" - 12) Straight Thread
X	#24 SAE (1 7/8" - 12) Straight Thread

NOTE: The same port size must be selected for both the outlet and bypass ports.

Load Sense Port:	7/16-20 for all sizes
------------------	-----------------------

** Multiple pumps available. Contact factory.

EXAMPLE:

(F3)- G-30LS-4- E-91-D-A-1-B-L-30

1	2	3	4	5	6	7	8	9	10	11	12
Special Seals	Pump Type	Series	Front Cover	Inlet Port	Displacement	Outlet Bypass Port	Shaft Seal	Shaft Type	Unload Pressure	Shaft Rotation	R. V. Setting

8 (Shaft Seal)

Order Code	Description
A	Single
B	Double

9 (Shaft Types)

Order Code	Description
1	SAE "C" Straight Keyed, 1.250" Dia., 1.875" Ext.
12	SAE "C" 14-Tooth Spline (Flat Root-Side Fit)
18 *	SAE "B" 13-Tooth Spline (Flat Root-Side Fit)

* Only available for Displacements 58 & 68.

Contact factory for requirements not listed above.

10 (Unload Pressure)

Order Code	Description
A	30 PSI Standard Bypass Spring
B*	60 PSI Bypass Spring

* "B" unload spring option required when system contains a high rate compensator spring in the directional control valve.

11 (Shaft Rotation)

Order Code	Description
L	Counterclockwise
Omit	Clockwise

12 (Relief Valve Setting)

Order Code	Description
10	1000 PSI (69 BAR)
12	1250 PSI (86 BAR)
15	1500 PSI (103 BAR)
17	1750 PSI (121 BAR)
20	2000 PSI (138 BAR)
22	2250 PSI (155 BAR)
25	2500 PSI (172 BAR)
27	2750 PSI (190 BAR)

13 (Load Sense Options)

Order Code	Description
A	Standard Load Sense
B	12 VDC with Spade Connector

14 (Design Designation)

Order Code	Description
10	Modification Level
	Design Level

Standard factory relief valve setting is 2500 PSI (172 BAR). Contact factory for other settings.



www.hbus.haldex.com



Haldex Barnes Corp.
2222 15th Street
ROCKFORD, IL 61104
USA
Tel: +1-815 398 4400
Fax: +1-815 398 5977
E-mail: sales@hbus.haldex.com

Haldex Barnes AB
Industrigatan 6, Box 511
SE-195 25 MÄRSTA
Sweden
Tel: +46-8 591 288 50
Fax: +46-8 591 288 60
E-mail: sales@hbse.haldex.com

Haldex Barnes Corp.
214 James Farm Road
Statesville, NC 28625
USA
Tel: +1-704 873 2587
Fax: +1-704 878 0530
E-mail: sales@hbus.haldex.com

Haldex Barnes GmbH
Seligenweg 12, Postfach 15 07
DE-95014 HOF
Germany
Tel: +49-9281 895-0
Fax: +49-9281 87133
E-mail: sales@hbde.haldex.com

Haldex Barnes AB
Ringvägen 3, Box 95
SE-280 40 SKÅNES FAGERHULT
Sweden
Tel: +46-433 32400
Fax: +46-433 30546
E-mail: sales@hbse.haldex.com



Haldex is an innovator in vehicle technology and supplies proprietary products for trucks, cars and industrial vehicles on a global basis.

Haldex is listed on the Stockholm Stock Exchange and has annual sales exceeding 6 billion SEK with 4,250 employees worldwide.

Innovative Vehicle Technology

PRODUCT RANGE

He Powerpacks
12/24/48 VDC 0.8 – 3.5 kW and
0.75 – 3 kW AC modular power
packs

Pressure Switches
5 - 350 bar, connecting/
disconnecting

He Classic Powerpacks
12/24/48 VDC modular
powerpacks in weatherproof
boxes

W300 Hydraulic pumps
0.8 – 5.7 cc/section 230 bar

W600 Hydraulic pumps
4 – 12 cc/section 276 bar

WM600 Hydraulic motors
4 – 12 cc/section 276 bar

W900 Hydraulic pumps
5 – 31 cc/section 276 bar

WM900 Hydraulic motors
5 - 31 cc/section 276 bar

WQ900 The quiet pump
5 - 23 cc/section 230 bar

W1500 Hydraulic pumps
19 - 50 cc/section 276 bar

WM1500 Hydraulic motors
19 - 50 cc/section 276 bar

G25 Hydraulic pumps
23 – 87 cc/section 250 bar

GM25 Hydraulic motors
23 – 87 cc/section 250 bar

GPA Internal Gear pumps
1.7 – 63 cc/section 100 bar

GC Hydraulic pumps / fluid motors
1.06 – 11.65cc/section 276 bar

II-Stage Hydraulic pumps
4.2 – 22.8 cc/section 276 bar

Rotary Flow Dividers
3.8 – 13.3 cc/section 300 bar

D Hydraulic pumps
3.8 - 22.9 cc/section 207 bar

G20/G30 Hydraulic pumps
23 – 161 cc/section 276 bar

GM20/GM30 Hydraulic motors
23 – 161 cc/section 276 bar

G20/G30 (LS) Hydraulic pumps
23 – 161 cc/section 276 bar

Transmission pumps

Fuel pumps

G20-LS/G30-LS 04 / 01